



- a** VentSure® Ventilation Products
- b** Pink Fiberglas™ Blown-In Insulation
- c** Owens Corning™ Hip & Ridge Shingles
- d** Owens Corning™ Shingles
- e** Owens Corning™ Underlayment Products
- f** WeatherLock® Self-Sealing Ice & Water Barrier Products
- g** Owens Corning™ Starter Shingle Products
- h** RapidFlow® Gutter Drainage Protection
- i** Undereave Ventilation Products

**Your peak performance system.**

It takes more than just shingles to create a high- performance roof.  
 It requires a system of products working together.  
 The Owens Corning Roofing System is a lineup of key products that can help provide maximum durability for your roof. And the most protection for your home.



INNOVATIONS FOR LIVING™

**OWENS CORNING BM (KOREA), LTD**  
 18F ILSONG BUILDING 157-37 SAMSUNG-DONG  
 GANGNAM-GU SEOUL 135-090, KOREA  
 TEL 822.2050.7490 FAX 822.2050.7499  
[www.owenscorning.co.kr](http://www.owenscorning.co.kr) [bm.shingle@owenscorning.com](mailto:bm.shingle@owenscorning.com)



OWENS CORNING WORLD HEADQUARTERS ONE OWENS CORNING PARKWAY TOLEDO, OHIO USA 43659 1-800-GET-PINK® <a href="http://www.owenscorning.com">www.owenscorning.com</a>	OWENS CORNING (CHINA) INVESTMENT CO., LTD. BLOCK B&C 4F TOMSON COMMERCIAL BLDG 710 DONGFANG ROAD PUDONG SHANGHAI 200122, CHINA <a href="http://www.owenscorningchina.com">www.owenscorningchina.com</a>	OWENS CORNING JAPAN 4F NISSEI TORANOMON BLDG 3-12-1 TORANOMON MINATO-GU TOKYO 1005-0001, JAPAN <a href="http://www.owenscorning.jp">www.owenscorning.jp</a>	OWENS CORNING HONG KONG LIMITED ROOM 1602 JUBILEE CENTRE 46 GLOUCESTER ROAD WANCHAI HONGKONG
---	--	---	--

THE PINK PANTHER™ & © 1964-2013 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved.  
 The color PINK is a registered trademark of Owens Corning. ©2013 Owens Corning. Pub. No. 657213001. Printed in Seoul, Korea. June 2013.



Owens Corning  
Roofing Collection

**No. 1 Shingle Brand**  
 \*Hanley-Wood Publishing survey  
 "the most recognizable brand in the market"



Oakridge® Pro 30™ Super Brownwood

**Owens Corning (NYSE : OC)** is a leading global producer of residential and commercial building materials, glass-fiber reinforcements and engineered materials for composite systems.

A Fortune 500 company for 59 consecutive years, Owens Corning has delivered breakthrough products in glass reinforcements throughout the history, and the company's building materials businesses make new and existing buildings more energy efficient, comfortable and attractive with its insulating systems, roofing, and masonry products.

Founded in 1938, the company is the market-leading innovator of glass fiber technology with sales of \$5.2 billion in 2012 and 16,000 employees in 30 countries on five continents.

**A Beautiful Decision**

**Choose beauty. And performance too.**

Owens Corning created roofing shingles that do more than protect a structure from the elements. Our shingle lineup is beautiful, too, and boasts a wide selection of color blends and styles that will complement the exterior design elements of any buildings.

From muted to bold, traditional to dimensional – and beyond – roofing shingles from Owens Corning feature richly colored granules that can help you craft the look of your choice. A look that delivers customers satisfaction and curb appeal for years to come.

Our eye-catching shingles come with maximum durability built in. So you can feel confident about choosing our roofing products. After all, Owens Corning has been a recognized leader in the building materials for over 65 years. We're known for making both residential and commercial buildings more comfortable, beautiful, and durable. And we can do the same for your next project.



**OAK EURO**  
Bring color and fashion to your roof - Oak Euro® six-sided shingles offer increased curb appeal and more sophisticated alternative to traditional shingle. Owens Corning Oak Euro Shingles can make any home rise above the rest. If you are interested in standing out from your neighbors, Oak Euro can help you deliver better solutions and more style choice.

\*See actual warranty for complete details, limitations and requirements.



**Oak Euro® : Applicable Standards & Codes**

ASTM E 108	Fire test. UL 790, Class A Rating
ASTM D 3018	Glass fiber reinforced shingle standard
ASTM D 3462	Standard for glass fiber shingles
KS F 4750	Asphalt Shingle

**Classic® : Applicable Standards & Codes**

ASTM E 108	Fire test. UL 790, Class A Rating
ASTM D 3161	Wind Performance Test : UL 997
ASTM D 3018	Glass fiber reinforced shingle standard
ASTM D 3462	Standard for glass fiber shingles
KS F 4750	Asphalt Shingle



The right choice for both beauty and value. Our Classic three-tab shingles offer you everything you need in a great roof – curb appeal, weather resistance, solid value and last durability.

\*See actual warranty for complete details, limitations and requirements.



CLASSIC®



**OAKRIDGE® PRO 30™**

*Super Sealant Technology*


Oakridge® Pro 30™ super shingles with *Super Sealant Technology* have it all : a bold, dimensional look with an attractive, well-blended appearance. These beautiful shingles also get high marks for durability because of their **30-Year Limited Warranty\*** with **110-MPH (177 KMPH) Wind Resistance Limited Warranty.**

\*See actual warranty for complete details, limitations and requirements.



**What is Super Sealant Technology?**


Our *Super Sealant Technology* is a proprietary weathering-grade asphalt sealant that is blended by Owens Corning. Oakridge® Pro 30™ super series with *Super Sealant Technology* are rated for 110MPH(177KMPH) winds.

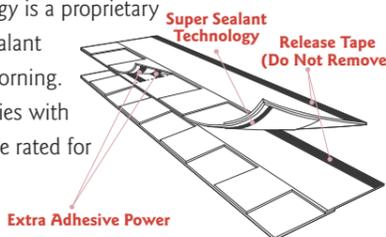

**Oakridge® Pro 30™ Super : Applicable Standards & Codes**

ASTM E 108	Fire test. UL 790, Class A Rating
ASTM D 3161	Wind Performance Test : UL 997
ASTM D 3018	Glass fiber reinforced shingle standard
ASTM D 3462	Standard for glass fiber shingles
KS F 4750	Asphalt Shingle

**Color Guide**

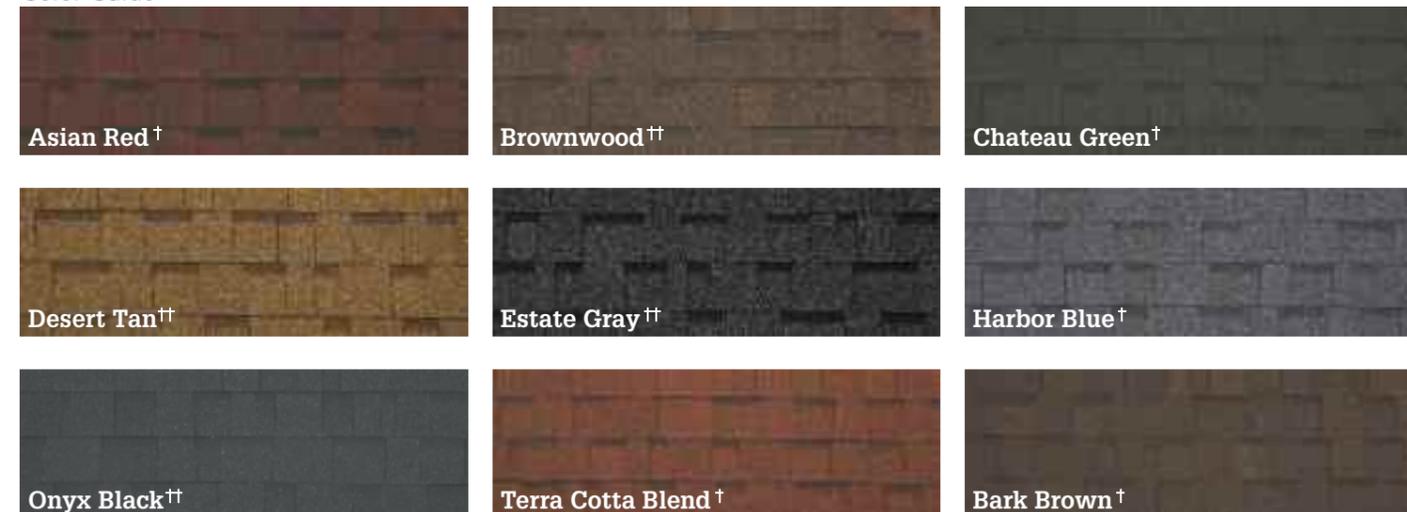

**Product Specifications**

Brand	Classic®	Oak Euro®	Oakridge Pro® 30™ Super
Products	3 Tab	6 Side	Laminated
*Warranty Period	20 years	25 years	30 years
Wind Resistance	97 kmph (60MPH)	—	177 kmph (110MPH)
Nominal Size	33.3 cm x 100 cm (13.11 inch x 39.38 inch)	31.8 cm x 100 cm (12.50 inch x 39.38 inch)	33.7 cm x 98 cm (13.25 inch x 38.75 inch)
Weight per Sq	196 lbs (89 kg)	166 lbs (75 kg)	239 lbs (108 kg)
PCS/bdl	65/3	66/3	64/4
Exposure	5.6 inch (14.3 cm)	5.2 inch (13.3 cm)	5.6 inch (14.3 cm)
Coverage per sq	100sq. ft. (9.27 m²)	97.0sq. ft. (9.0 m²)	96.9sq. ft. (9.0 m²)
Packing	3Bbl/Sq (20Sq/Plt)	3Bbl/Sq (20Sq/Plt)	4Bbl/Sq (16Sq/Plt)

\* See actual warranty for complete details, limitations and requirements.

† Due to manufacturing variances, the limitations of the printing process and the variations in natural lighting, actual shingle colors and granule blends may vary from the photo or the product swatch. Color availability subject to change without notice.

†† Available in Algae Resistance (AR) on a regional basis.